


LED LIGHT PANEL SMD

WU-M-520-C

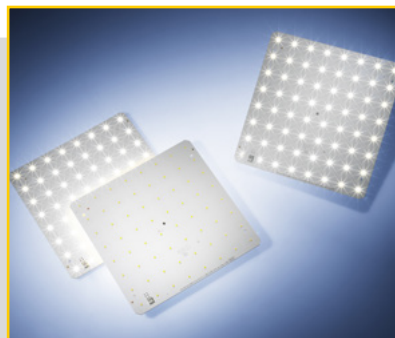

LED LIGHT PANEL SMD – LED MODULES FOR OFFICE LIGHTING

WU-M-520-C

Typical Applications

Built-in luminaires/general illumination


- Office lighting, especially grid luminaires 600x600 mm
- Retail lighting
- T5/T8 replacement as built-in module
- Furniture lighting
- Backlighting for advertising

LED Light Panel, 250x250 mm

- **LONG SERVICE LIFE: 60,000 H (L80, B10)**
- **HIGHLY EFFICIENT: UP TO 198 LM/W
AT T_p = 50 °C**
- **VERY NARROW COLOUR TOLERANCES:
3 STEP MACADAM**

LED Light Panel Gen. 2

Technical Notes

- LED built-in module for integration into luminaires 
- Dimensions: 249x249 mm
- Driving current: 250 mA / 300 mA / 350 mA / 500 mA / 700 mA
- On-board push-in terminals
- Colour tolerance: 3-step MacAdam
- Beam angle: 120°
- High-reflective solder-resist



Electrical Characteristics

at $t_p = 50\text{ °C}$

Type	No. of LEDs pcs.	Typ. voltage DC*					Temperature coefficient mV/K	Typ. power consumption*				
		250 mA V	300 mA V	350 mA V	500 mA V	700 mA V		250 mA W	300 mA W	350 mA W	500 mA W	700 mA W
WU-M-520-C	64	21.4	21.6	21.7	22.2	22.7	-22.32	5.3	6.5	7.6	11.1	15.9

Voltage and power consumption tolerance: $\pm 10\%$

Use of external LED constant current driver required.

Maximum Ratings

Exceeding the maximum ratings can lead to reduction of service life or destruction of the module.

Type	Operation temperature range at t_c point		Storage temperature range		Max. allowed repetitive peak current mA
	$^{\circ}\text{C}$ min.	$^{\circ}\text{C}$ max.	$^{\circ}\text{C}$ min.	$^{\circ}\text{C}$ max.	
WU-M-520-C	-20	+85	-20	+85	1480

Optical Characteristics

at $t_p = 50\text{ °C}$, CRI: $R_a > 80$

Type	Ref. No.	Colour	Correlated colour temperature (K)	Typ. luminous flux* (lm) and typ. efficiency (lm/W) at										Photometric code
				250 mA		300 mA		350 mA		500 mA		700 mA		
				lm	lm/W	lm	lm/W	lm	lm/W	lm	lm/W	lm	lm/W	
WU-M-520-C-830	570008	warm white	3000	1000	187	1195	184	1385	182	1950	176	2680	168	830/349
WU-M-520-C-840	570009	neutral white	4000	1055	198	1260	195	1460	192	2055	185	2830	178	840/349
WU-M-520-C-850	570010	cool white	5000	1055	198	1260	195	1460	192	2055	185	2830	178	850/349
WU-M-520-C-865	570011	cool white	6500	1055	198	1260	195	1460	192	2055	185	2830	178	865/349

* Colour tolerance: 3 MacAdams | ** Production tolerance of luminous flux and efficiency: $\pm 10\%$ | CRI > 90 on request


Operating Life

L80/B10

Temperature	I_f 350 mA	I_f 500 mA	I_f 700 mA
at $t_p = 50\text{ °C}$	> 60,000 hrs.	> 60,000 hrs.	> 60,000 hrs.
at $t_p = 70\text{ °C}$	> 60,000 hrs.	> 60,000 hrs.	> 60,000 hrs.

Typical Light Distribution Curve

Data are available in .ldt format for download under www.vossloh-schwabe.com.




The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

LED modules – LED Light Panel Gen. 2, 250x250 mm

Mechanical Dimensions

- The number of modules that can be connected in series depends on the available output voltage of the LED driver.
- The clearance and creepage distances are designed for working voltages up to 500 V DC (basic insulation) and 250 V DC (reinforced insulation).
- Max. diameter of screw head (M4): \varnothing 8 mm


WU-M-520-C

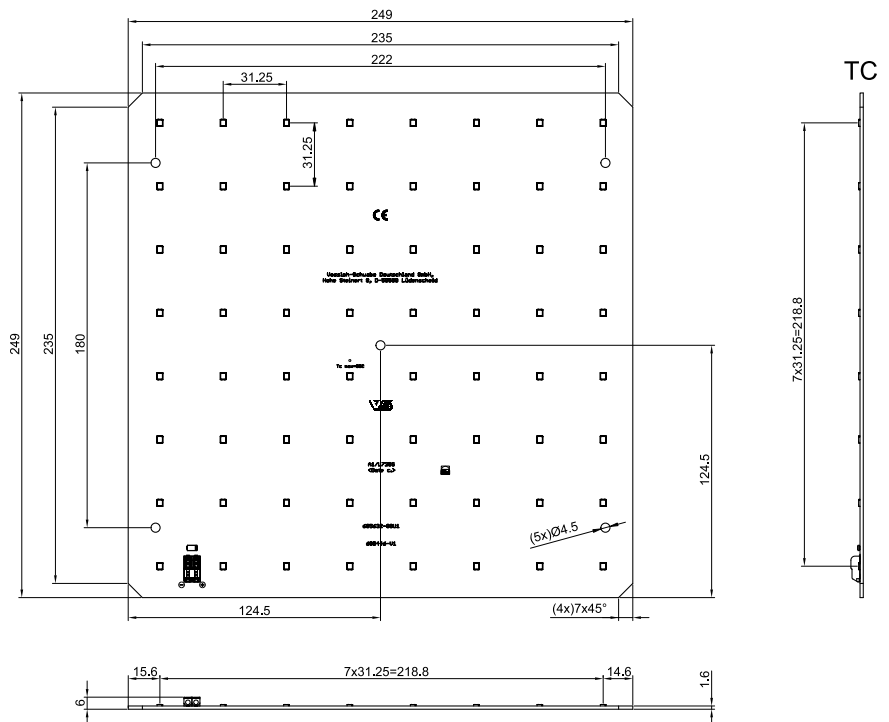


Connection Examples

With 10 mm distance between LED modules

Feed-in lateral with wiring on top

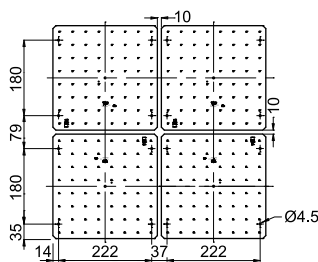


Feed-in central with rear wiring

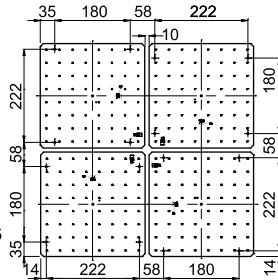


Connection Diagram 1 – Decentralised Feed-in

4 LED Panels WU-M-520-C (all in series)

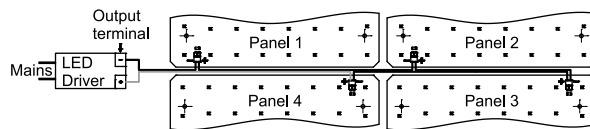


Without distance between LED modules

Feed-in lateral with wiring on top

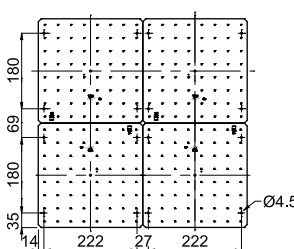


Feed-in central with rear wiring

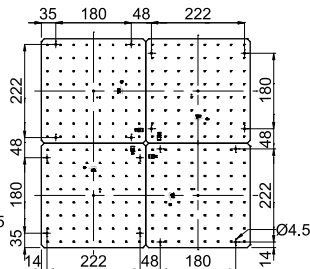

Connection Diagram 2 – Centralised Feed-in


4 LED Panels WU-M-520-C (all in series)

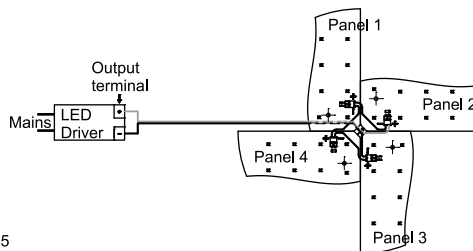

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.


LED modules – LED Light Panel Gen. 2, 250x250 mm

Bins

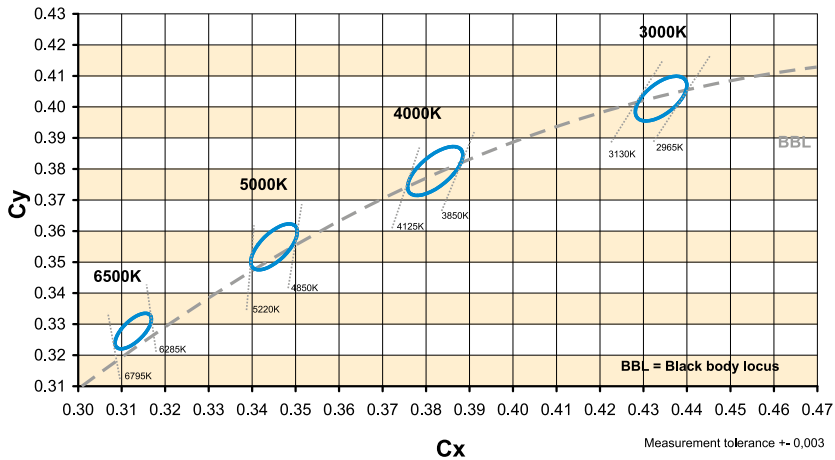

Fixing Clip

For fastening LED PCBs to luminaire sheets without needing screws
 PCB hole dia.: 4.3–4.7 mm
 Vibration resistant version
 Material: PC, white (UL-94 V2)
 Weight: 0.2 g, Packaging unit: 1000 pcs. (.11 = 10,000 pcs.)

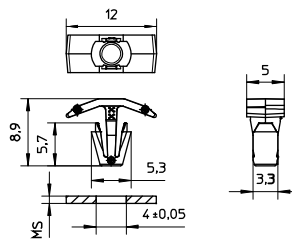

Type	Ref. No.	For luminaire sheet thickness (MS) mm
98050	562870	0.5–1.0*

* PCB thickness: 1.6 mm

LED Constant Current Drivers

Please visit our homepage for details for suitable LED constant current drivers: www.vossloh-schwabe.com

Assembly and Safety Information

Installation must be carried out under observation of the relevant regulations and standards. The LED modules are designed for operation within a casing or luminaire. Installation must be carried out in a voltage-free state (i.e. disconnection from the mains). The following advice must be observed; non-observance can result in the destruction of the LED assembly modules, fire and/or other hazards.

- Consider safety regulations acc. EN 60598 in the luminaire design, especially when the operating LED driver is not galvanic isolated (not SELV).
 - In mode of operation regard to sufficient isolation.
 - Live parts must not be touched in operation mode.



- ESD (electrostatic discharge) protection measures must be observed when handling and installing the LED modules. See VS's application notes on ESD protection.
- Adequate anti-static electricity measures, including the use of conductive shoes, ionizers, work bench grounding, wrist straps, flooring and stools could be used.
- Adequate anti-static electricity measures, including the use of conductive shoes, ionizers, work bench grounding, wrist straps, flooring and stools could be used.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

Assembly and Safety Information

- LED assembly modules must not be subjected to any undue mechanical stress, e. g.:
 - do not treat as bulk cargo
 - avoid shear and compressive forces during handling and installation
 - do not damage circuit paths
 - avoid any pressure on the light emitting surface
- Safe operation only possible by the use of external constant current sources (I_{max} , see table "Electrical Characteristics").
- Operation only with power supply units that feature the following protection:
 - Short-circuit protection
 - Overload protection
 - Overheating protection
- Please ensure the correct polarity of the leads prior to commissioning. Reversed polarity can destroy the modules.
- For interconnection the LED modules is equipped with push-in terminals (WAGO 2060).
- Safety regulations acc. to EN 60598 (or further standards) has to be observed if the maximum output voltage exceed the permitted touchable value.
- The following points must be observed when connecting LED modules in parallel:
 - All LED strings that are wired in parallel must contain the same number of LEDs (symmetrical loading).
 - Owing to differing forward biases, there can be a difference of up to 10% in brightness between modules connected in parallel.
- To ensure problem-free operation, the specified maximum temperature at the t_p point (see "Operating Life") must be observed (and measured in accordance with EN 60598-1). To satisfy this point, it may be necessary to put measures in place to ensure any heat is dissipated from the PCB to the environment.
- In the event of outdoor applications or applications in damp locations, care must be taken to protect LED assembly modules against humidity, splashes and jets of water. Any corrosion damage resulting from humidity or contact with condensation will not be recognised as a defect or manufacturing fault. LED assembly modules are not specially protected against foreign bodies or dust. Depending on the type of application, further protection must be ensured to prevent dust and foreign bodies from entering.

- Due to the manufacturing process, the PCBs of the LED assembly modules can have sharp edges and corners. Care must therefore be taken during handling and installation to avoid injury.
- For optimal load of used constant current driver the modules can only be connected in series. The quantity of LED modules is limited by the sum of forward voltage and the capacity of used constant current driver. Safety regulations acc. to EN 60598 has to be observed if the sum of forward voltage exceed the permitted touchable value.
- Operating LED modules in the presence of certain chemical substances or in chemically enriched (aggressive) environments can impair module functionality or even cause total module failure. Detailed information can be found in our "Chemical Incompatibility" PDF on our website www.vossloh-schwabe.com
- The photobiological safety of the LED modules must be classified into risk groups in accordance with EN 62471: 2008
Assessment of risk groups in acc. with IEC/TR 62778: risk group 1

Applied Standards

EN 62031

LED modules for general lighting – Safety specifications

EN 62471

Photobiological safety of lamps and lamp system

Product Guarantee

- 5 years
- The conditions for the Product Guarantee of the Vossloh-Schwabe Group shall apply as published on our homepage (www.vossloh-schwabe.com). We will be happy to send you these conditions upon request.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.