

LED Line SMD **Easy** - L14/28/56 W2

LED LINE SMD **EASY**

L14/28/56 W2

350 lm, 700 lm, 1400 lm



LED LINE SMD **EASY**

L14/28/56 W2

- 350 lm, 700 lm, 1400 lm

WU-M-622, WU-M-601/602, WU-M-603/604

Typical Applications

Built-in luminaires/general illumination

- Office lighting
- Retail, corridor and shelf lighting
- T5/T8 replacement as built-in module
- Furniture lighting
- Backlighting for advertising

LED Line SMD Easy
- L14/28/56 W2

■ **LONG SERVICE LIFE TIME: 50,000 H (L70, B10)**

■ **HIGHLY EFFICIENT: UP TO 170 LM/W
AT T_p = 50 °C**

■ **3 LENGTHS AVAILABLE: 140 / 280 / 560 MM**


■ **3 DIFFERENT LUMEN PACKAGES**

■ **ZHAGA-COMPLIANT DIMENSIONS**

LED Line SMD **Easy** - 14/28/56 W2


Technical Notes

- LED built-in module for integration into luminaires
- Dimensions
WU-M-622: 140x20 mm
WU-M-601/602: 280x20 mm
WU-M-603/604: 560x20 mm
- Driving current: 200 mA / 250 mA / 300 mA / 350 mA / 500 mA / 700 mA
- On-board push-in terminals, optional on top or bottom
- Colour tolerance: 2-step MacAdam (per Bin)
- Beam angle: 120°

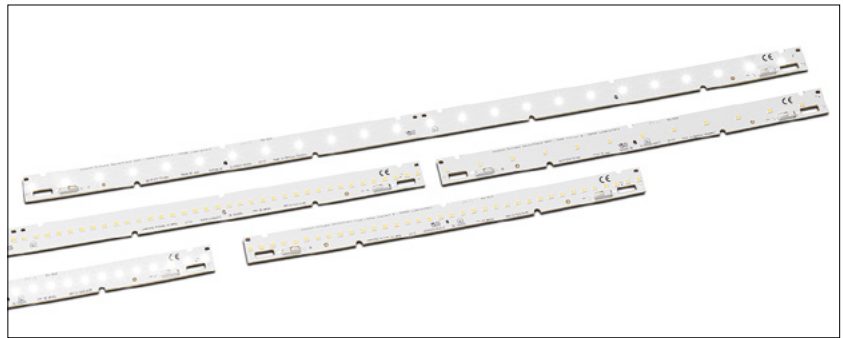

Typical Light Distribution Curve

Data are available in .Idt format for download under www.vossloh-schwabe.com.



Covers and W2 optics

Please visit our homepage for details for suitable covers and W2 optics:

- www.vossloh-schwabe.com/en/products/optics-reflectors/linear-covers/linear-covers-1-for-led-line-smd-w2-pcb/
- www.vossloh-schwabe.com/en/products/optics-reflectors/linear-optics/linear-optics-1-for-led-line-smd-w2-pcb/

Electrical Characteristics

at $t_p = 50\text{ °C}$

Type	No. of SMDs	Typ. voltage DC						Typ. power consumption					
		200 mA V	250 mA V	300 mA V	350 mA V	500 mA V	700 mA V	200 mA W	250 mA W	300 mA W	350 mA W	500 mA W	700 mA W
LED Line SMD Easy – L14 W2													
WU-M-622	12	8.5	8.5	8.6	8.7	8.9	9.2	1.7	2.2	2.6	3.1	4.5	6.4
LED Line SMD Easy – L28 W2													
WU-M-601	12	17.5	17.8	18.0	18.3	–	–	3.5	4.4	5.4	6.4	–	–
WU-M-602	24	16.9	17.0	17.2	17.3	17.8	18.3	3.4	4.3	5.2	6.1	8.9	12.8
LED Line SMD Easy – L56 W2													
WU-M-603	24	35.0	35.5	36.0	36.6	–	–	7.0	8.9	10.8	12.8	–	–
WU-M-604	48	33.7	34.0	34.4	34.7	35.5	36.6	6.7	8.5	10.3	12.1	17.8	25.6

Voltage and power consumption tolerance: $\pm 10\%$ | **Use of external LED constant current driver required.**

Maximum Ratings

Exceeding the maximum ratings can lead to reduction of service life or destruction of the module.

Type	Operating current [mA]	Operation temperature range at t_c point		Storage temperature range		Max. allowed repetitive peak current mA
		°C min.	°C max.	°C min.	°C max.	
WU-M-622	all	-20	+75	-20	+80	800
WU-M-601/603						400
WU-M-602/604						800

Operating Life

L70/B10

in hours at measured temperature at t_p point

	200 mA			250 mA			300 mA			350 mA			500 mA			700 mA		
	40 °C	50 °C	75 °C	40 °C	50 °C	75 °C	40 °C	50 °C	75 °C	40 °C	50 °C	75 °C	40 °C	50 °C	75 °C	40 °C	50 °C	75 °C
WU-M-622	54,000			54,000			54,000			54,000	54,000	54,000	54,000			54,000	53,000	40,000
WU-M-601/603	54,000			54,000			54,000			54,000	53,000	40,000	–			–		
WU-M-602/604	54,000			54,000			54,000			54,000	54,000	54,000	54,000			54,000	53,000	40,000

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

LED Line SMD Easy – L14/28/56 W2

Optical Characteristics

at $t_p = 50\text{ °C}$

CRI: $R_a > 80$

Type	Colour	Ref. No.		CCT	Typ. luminous flux* and typ. efficiency *												Photo-metric code
		Connection			at												
		top (TC)	bottom (BC)		200 mA		250 mA		300 mA		350 mA		500 mA		700 mA		
		K	lm	lm/W	lm	lm/W	lm	lm/W	lm	lm/W	lm	lm/W	lm	lm/W	lm	lm/W	
LED Line SMD Easy – L14 W2																	
WU-M-622-TC/BC-830	warm white	on req.	on req.	3000	268	159	330	153	393	151	450	148	620	139	820	128	830/479
WU-M-622-TC/BC-840	neutral white	569079	on req.	4000	283	166	350	163	413	159	475	156	653	147	865	135	840/479
WU-M-622-TC/BC-850	cool white	on req.	on req.	5000	288	169	355	165	420	162	485	159	665	149	883	138	850/479
WU-M-622-TC/BC-865	cool white	569080	on req.	6500	278	164	343	160	405	156	468	153	643	144	850	133	865/479
LED Line SMD Easy – L28 W2																	
WU-M-601-TC/BC-830	warm white	567485	567489	3000	510	146	620	140	725	134	820	128	–	–	–	–	830/479
WU-M-601-TC/BC-840	neutral white	567486	567490	4000	535	153	655	147	765	142	865	135	–	–	–	–	840/479
WU-M-601-TC/BC-850	cool white	567487	567491	5000	545	156	665	150	775	143	880	138	–	–	–	–	850/479
WU-M-601-TC/BC-865	cool white	567488	567492	6500	525	150	640	144	750	139	850	133	–	–	–	–	865/479
WU-M-602-TC/BC-830	warm white	567493	567497	3000	535	159	660	155	785	152	900	148	1240	140	1640	128	830/479
WU-M-602-TC/BC-840	neutral white	567494	567498	4000	565	168	700	165	825	160	950	157	1305	147	1730	135	840/479
WU-M-602-TC/BC-850	cool white	567495	567499	5000	575	170	710	167	840	163	970	160	1330	150	1765	138	850/479
WU-M-602-TC/BC-865	cool white	567496	567500	6500	555	165	685	161	810	157	935	154	1285	145	1700	133	865/479
LED Line SMD Easy – L28 W2 – STC (Small Top Connector)																	
WU-M-602-STC-830	warm white	569418	–	3000	535	159	660	155	785	152	900	148	1240	140	1640	128	830/479
WU-M-602-STC-840	neutral white	569419	–	4000	565	168	700	165	825	160	950	157	1305	147	1730	135	840/479
LED Line SMD Easy – L56 W2																	
WU-M-603-TC/BC-830	warm white	567501	567505	3000	1020	146	1240	140	1445	134	1640	128	–	–	–	–	830/479
WU-M-603-TC/BC-840	neutral white	567502	567506	4000	1075	154	1305	147	1525	141	1730	135	–	–	–	–	840/479
WU-M-603-TC/BC-850	cool white	567503	567507	5000	1095	157	1330	150	1555	144	1765	138	–	–	–	–	850/479
WU-M-603-TC/BC-865	cool white	567504	567508	6500	1055	151	1285	145	1500	139	1700	133	–	–	–	–	865/479
WU-M-604-TC/BC-830	warm white	567509	567513	3000	1070	159	1325	156	1565	152	1805	149	2480	140	3285	128	830/479
WU-M-604-TC/BC-840	neutral white	567510	567514	4000	1130	168	1395	164	1655	161	1905	157	2615	147	3465	135	840/479
WU-M-604-TC/BC-850	cool white	567511	567515	5000	1150	170	1420	167	1685	163	1940	160	2660	150	3530	138	850/479
WU-M-604-TC/BC-865	cool white	567512	567516	6500	1110	165	1370	161	1625	158	1870	154	2565	144	3400	133	865/479
LED Line SMD Easy – L56 W2 – STC (Small Top Connector)																	
WU-M-604-STC-830	warm white	569420	–	3000	1070	159	1325	156	1565	152	1805	149	2480	140	3285	128	830/479
WU-M-604-STC-840	neutral white	569421	–	4000	1130	168	1395	164	1655	161	1905	157	2615	147	3465	135	840/479

* Production tolerance of luminous flux and efficiency: $\pm 10\%$ | CRI > 90 on request


Minimum order quantity (packaging unit): 150 pcs. (WU-M-601, -602); 120 pcs. (WU-M-603, -604); 100 pcs. (WU-M-622)

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

LED Line SMD Easy – L14/28/56 W2


Mechanical Dimensions

WU-M-622

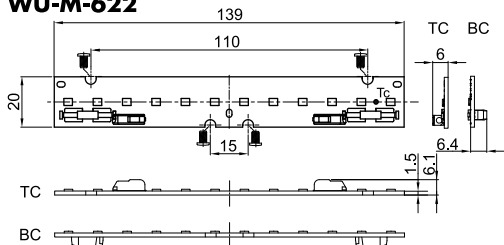


TC = Top Connection
BC = Bottom Connection
STC = Small Top Connection


WU-M-601

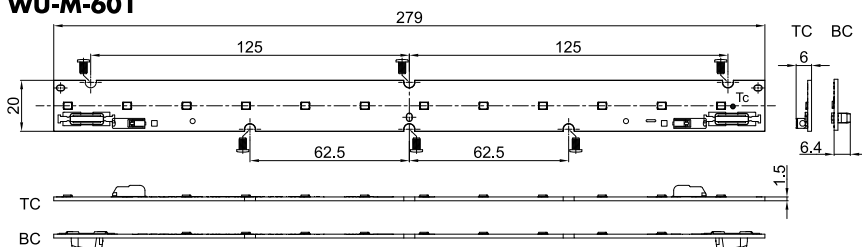

WU-M-602

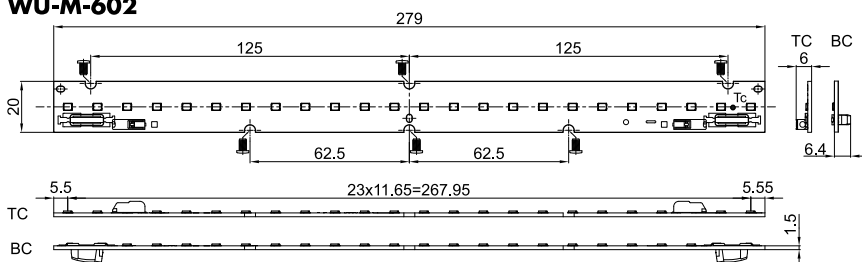

WU-M-602 STC

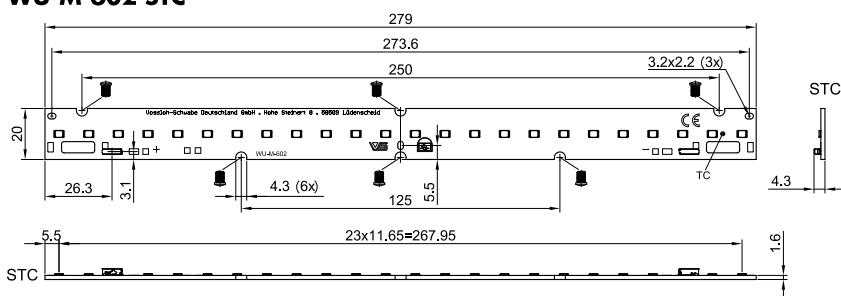


The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

LED Line SMD Easy – L14/28/56 W2


Mechanical Dimensions

WU-M-603

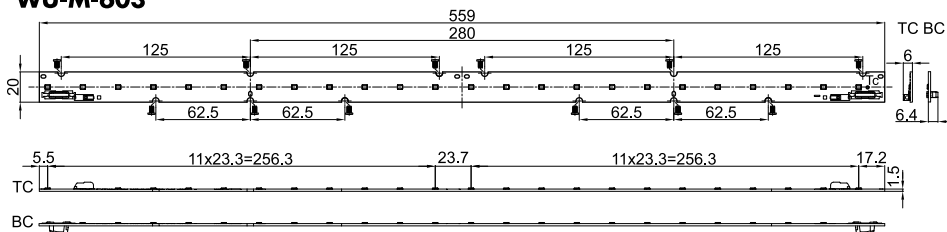


TC = Top Connection
BC = Bottom Connection
STC = Small Top Connection

WU-M-604

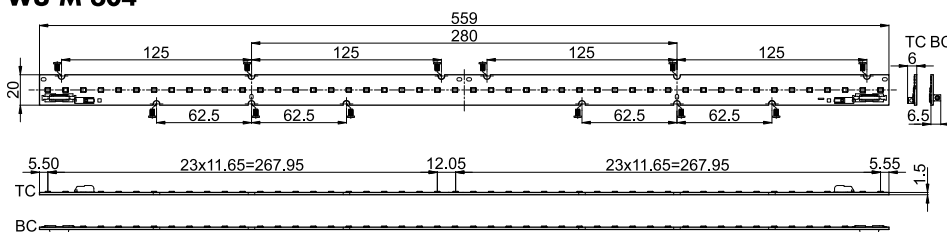


WU-M-604 STC

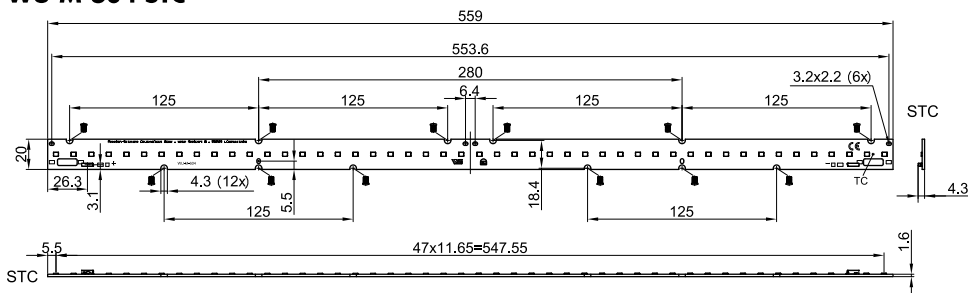


The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

LED Line SMD Easy – L14/28/56 W2


Connection Example

- The number of modules that can be connected in series depends on the available output voltage of the LED driver.
- The clearance and creepage distances are designed for working voltages up to 350 V DC (basic insulation) and 185 V DC (reinforced insulation).
- In case of assembly of the LED modules in profiles (e.g. aluminium) where the profile touches the top edge of the PCB the clearance and creepage distances are reduced to 175 V DC (basic insulation) and 50 V DC (reinforced insulation).
- Max. diameter of screw head (M4): \varnothing 8 mm
- Only the marked holes  are fixing holes for screws M4. Please do not use other holes for fixation!

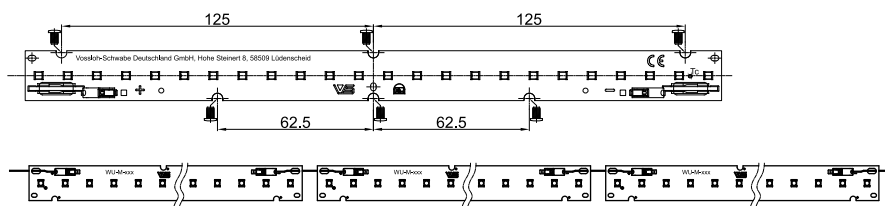


Bins

The standard shipping format regarding the reference numbers includes all chromaticity coordinate groups. The chromaticity coordinate groups of 2-step MacAdam distribution (E22, E32,...) can be identified on the product and packaging label.

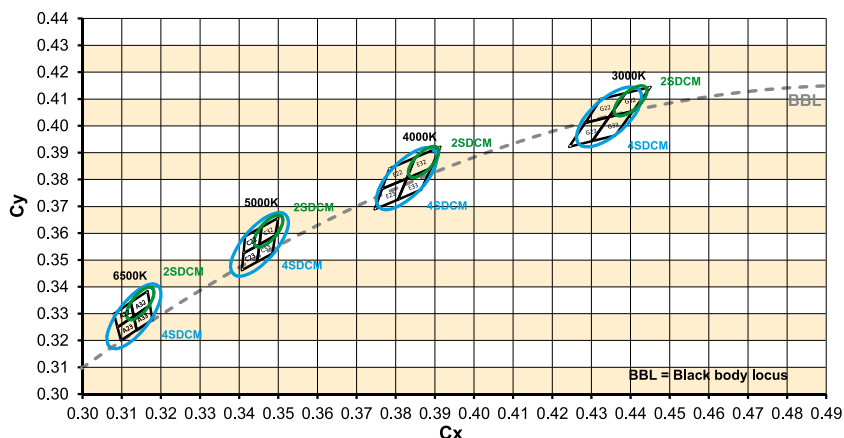

Fixing Clip

For fastening LED PCBs to luminaire sheets without needing screws
 PCB hole dia.: 4.3-4.5 mm
 Vibration resistant version
 Material: PC, white (UL-94 V2)
 Weight: 0.2 g, Packaging unit: 1000 pcs. (.11 = 10,000 pcs.)

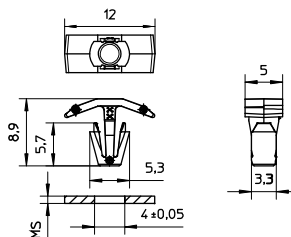

Type	Ref. No.	For luminaire sheet thickness (MS) mm
98050	562870	0.5-1.0*

* PCB thickness: 1.6 mm

Linear LED Constant Current Drivers

Please visit our homepage for details for suitable LED constant current drivers: www.vossloh-schwabe.com

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.

LED Line SMD Easy – L14/28/56 W2

Assembly and Safety Information

Installation must be carried out under observation of the relevant regulations and standards. The LED modules are designed for operation within a casing or luminaire. Installation must be carried out in a voltage-free state (i.e. disconnection from the mains). The following advice must be observed; non-observance can result in the destruction of the LED assembly modules, fire and/or other hazards.

- Consider safety regulations acc. EN 60598 in the luminaire design, especially when the operating LED driver is not galvanic isolated.
 - In mode of operation regard to sufficient isolation.
 - Live parts must not be touched in operation mode. Danger in life!!!
- ESD (electrostatic discharge) protection measures must be observed when handling and installing the LED modules. See VS's application notes on ESD protection.
- Adequate anti-static electricity measures, including the use of conductive shoes, ionizers, work bench grounding, wrist straps, flooring and stools should be used.
- LED assembly modules must not be subjected to any undue mechanical stress, e. g.:
 - do not treat as bulk cargo
 - avoid shear and compressive forces during handling and installation
 - do not damage circuit paths
 - avoid any pressure on the light emitting surface
- Safe operation only possible by the use of external constant current sources (I_{max} . see table "Electrical Characteristics").
- Operation only with power supply units that feature the following protection:
 - Short-circuit protection
 - Overload protection
 - Overheating protection
- The module can be fixed with M4 screws. Fixation only with flat or cylinder head screws (M4) (no countersunk screws)
Max. torque: 1.2 Nm (M4)
- Please ensure the correct polarity of the leads prior to commissioning. Reversed polarity can destroy the modules.
- For interconnection the LED modules is equipped with push-in terminals.
- Safety regulations acc. to EN 60598 (or further standards) has to be observed if the maximum output voltage exceed the permitted touchable value.
- Measurement tolerances:
 - luminous flux: $\pm 7\%$
 - voltage: $\pm 3\%$
 - CRI: ± 1
- The following points must be observed when connecting LED modules in parallel:
 - All LED strings that are wired in parallel must contain the same number of LEDs (symmetrical loading).
 - Owing to differing forward biases, there can be a difference of up to 10% in brightness between modules connected in parallel.



- To ensure problem-free operation, the specified maximum temperature at the t_p point (see "Operating Life") must be observed (and measured in accordance with EN 60598-1). To satisfy this point, it may be necessary to put measures in place to ensure any heat is dissipated from the PCB to the environment.
- In the event of outdoor applications or applications in damp locations, care must be taken to protect LED assembly modules against humidity, splashes and jets of water. Any corrosion damage resulting from humidity or contact with condensation will not be recognised as a defect or manufacturing fault. LED assembly modules are not specially protected against foreign bodies or dust. Depending on the type of application, further protection must be ensured to prevent dust and foreign bodies from entering.
- Due to the manufacturing process, the PCBs of the LED assembly modules can have sharp edges and corners. Care must therefore be taken during handling and installation to avoid injury.
- For optimal load of used constant current driver the modules can only be connected in series. The quantity of LED modules is limited by the sum of forward voltage and the capacity of used constant current driver. Safety regulations acc. to EN 60598 has to be observed if the sum of forward voltage exceed the permitted touchable value.
- Operating LED modules in the presence of certain chemical substances or in chemically enriched (aggressive) environments can impair module functionality or even cause total module failure. Detailed information can be found in our "Chemical Incompatibility" PDF on our website www.vossloh-schwabe.com
- The photobiological safety of the LED modules must be classified into risk groups in accordance with EN 62471: 2008. Rating in accordance with IEC / TR 62778: risk group 1

Applied Standards

EN 62031

LED modules for general lighting – Safety specifications



pending

(except WU-M-622)

EN 62471

Photobiological safety of lamps and lamp systems

Product Guarantee

- 5 years
- The conditions for the Product Guarantee of the Vossloh-Schwabe Group shall apply as published on our homepage (www.vossloh-schwabe.com). We will be happy to send you these conditions upon request.

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.